

Electrostatic Precipitator Specifications


Models with Blowerless Assembly

Designed for rapid movement of plant air, our standard electrostatic precipitator models **ESP MINOR 2200**, **ESP MINOR 4400** and **ESP MINOR 6600** with blowerless assembly may be mounted for either free-hanging or ducting applications.

The model number refers to the systems nominal capacity.

Blowerless are ideal for installation in ductwork already equipped with external blowers. These units are the same as the blower models in all other facets, incorporating aluminum pre and post filters, ionizer assembly, collection cell, hinged access doors, drain fittings and more

MODEL	NOMINAL CAPACITY (CMH)	OPERATING VOLTAGE EUROPEAN VOLTAGE*	WEIGHT	DIMENSIONS(MM)		
				A	B	C
MINOR 2200	2200	220/1/50Hz	60 KG	400	725	710
MINOR 4400	4400	220/1/50Hz	100 KG	800	725	710
MINOR 6600	6600	220/1/50Hz	135 KG	1200	725	710

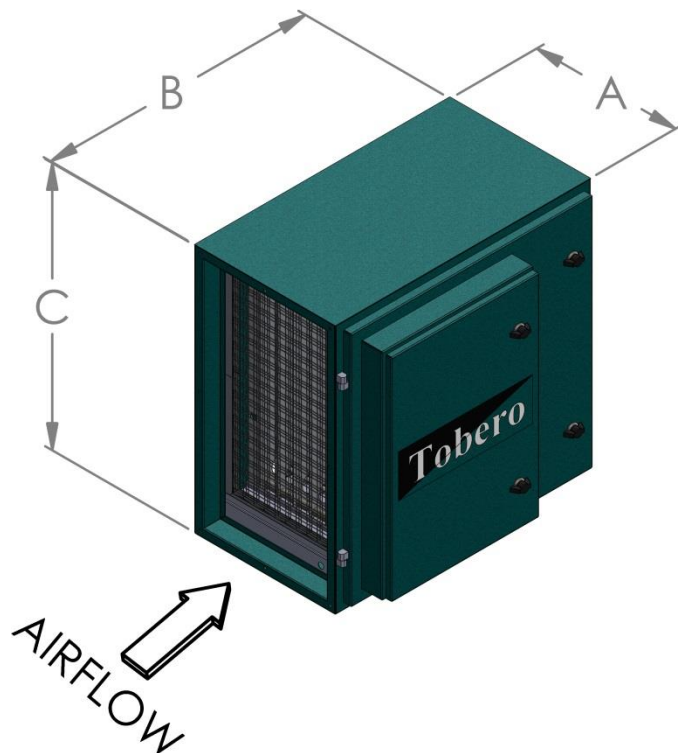

** The HP ratings are standard. Additional external static pressure at the rated CMH is available with increased horsepower. Contact for details. Single-phase units available.