

Medium Efficiency / Secondary-Filtration

Aluminum & Stainless-Steel Air Filters

Material Overview

- ◆ Easily cleaned and service for saving cost
- ◆ Providing durable life for filtration uses
- ◆ The most economic and most effective way for industrial ventilation equipment

Application


- ◆ All Stainless-Steel Air Filter has low resistance and high dust collection capacity which make filter to be an ideal filter for many industrial uses



Standard

ASHRAE 52.2:2017	-
EN779:2012	-
Filter Depth (Inches)	1", 2"
Frame Material	Aluminum, Stainless Steel

Initial Resistance Vs Airflow

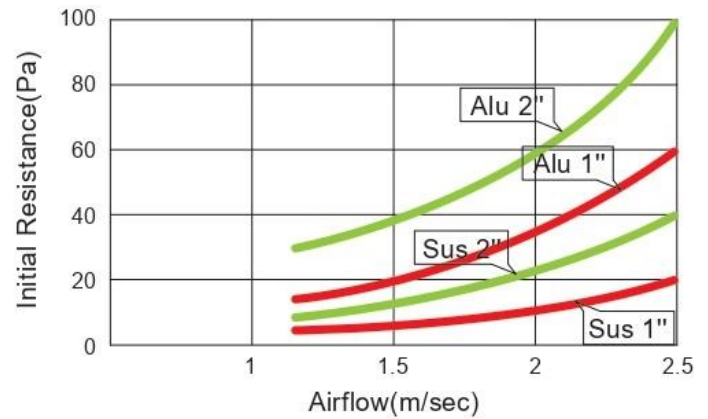

Product Details

Model	Nominal Size Inches (H x W x D)	Actual Size mm (H x W x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
1"				
CF	12 x 24 x 1	289 x 595 x 22	1,700	22.5
	20 x 20 x 1	492 x 492 x 22	2,380	
	20 x 24 x 1	492 x 595 x 22	2,800	
	24 x 24 x 1	595 x 595 x 22	3,400	
2"				
CF	12 x 24 x 2	289 x 595 x 45	1,700	32.3
	20 x 20 x 2	492 x 492 x 45	2,380	
	20 x 24 x 2	492 x 595 x 45	2,800	
	24 x 24 x 2	595 x 595 x 45	3,400	

* Other dimensions are available on request *

TOBERO PTE LTD

25 KAKI BUKIT ROAD 4, #07-49/50 SYNERGY
SINGAPORE 417800
TEL: 6749 0933 FAX: 6741 9550