

Coarse Efficiency / Pre-Filtration

Carbon Pleated Filters

Material Overview

- ◆ 100% incinerable, Low pressure drop
- ◆ Can be used to upgrade existing installation
- ◆ Light weight and clean

Application


- ◆ Odors removed by Activated Carbon
- ◆ Food Odors
- ◆ Paint Fumes
- ◆ Ozone



Standard

ASHRAE 52.2:2017	MERV 8
EN779:2012	G4
Efficiency	NBS 30% - 35%
Filter Depth (Inches)	2", 4"
Media Type	Non-Woven + Activated Carbon
Frame Material	Moisture Resistant Beverage Board
Rec. Final Resistance	350 Pa Max Operating
Temperature	40°C

Initial Resistance Vs Airflow

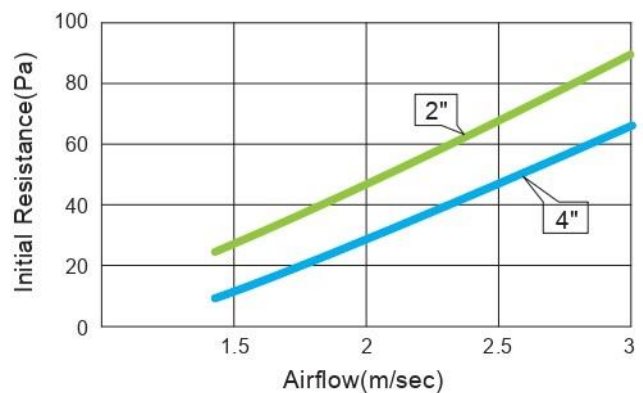

Product Details

Model	Nominal Size Inches (H x W x D)	Actual Size mm (H x W x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
2"				
CEPA	12 x 24 x 2	289 x 593 x 45	1,700	65
	20 x 20 x 2	492 x 492 x 45	2,380	
	20 x 24 x 2	492 x 593 x 45	2,800	
	24 x 24 x 2	593 x 593 x 45	3,400	
4"				
CEPA	12 x 24 x 4	289 x 593 x 95	1,700	45
	20 x 20 x 4	492 x 492 x 95	2,380	
	20 x 24 x 4	492 x 593 x 95	2,800	
	24 x 24 x 4	593 x 593 x 95	3,400	

* Other dimensions are available on request *

TOBERO PTE LTD

25 KAKI BUKIT ROAD 4, #07-49/50 SYNERGY
SINGAPORE 417800
TEL: 6749 0933 FAX: 6741 9550